



IS4030UT

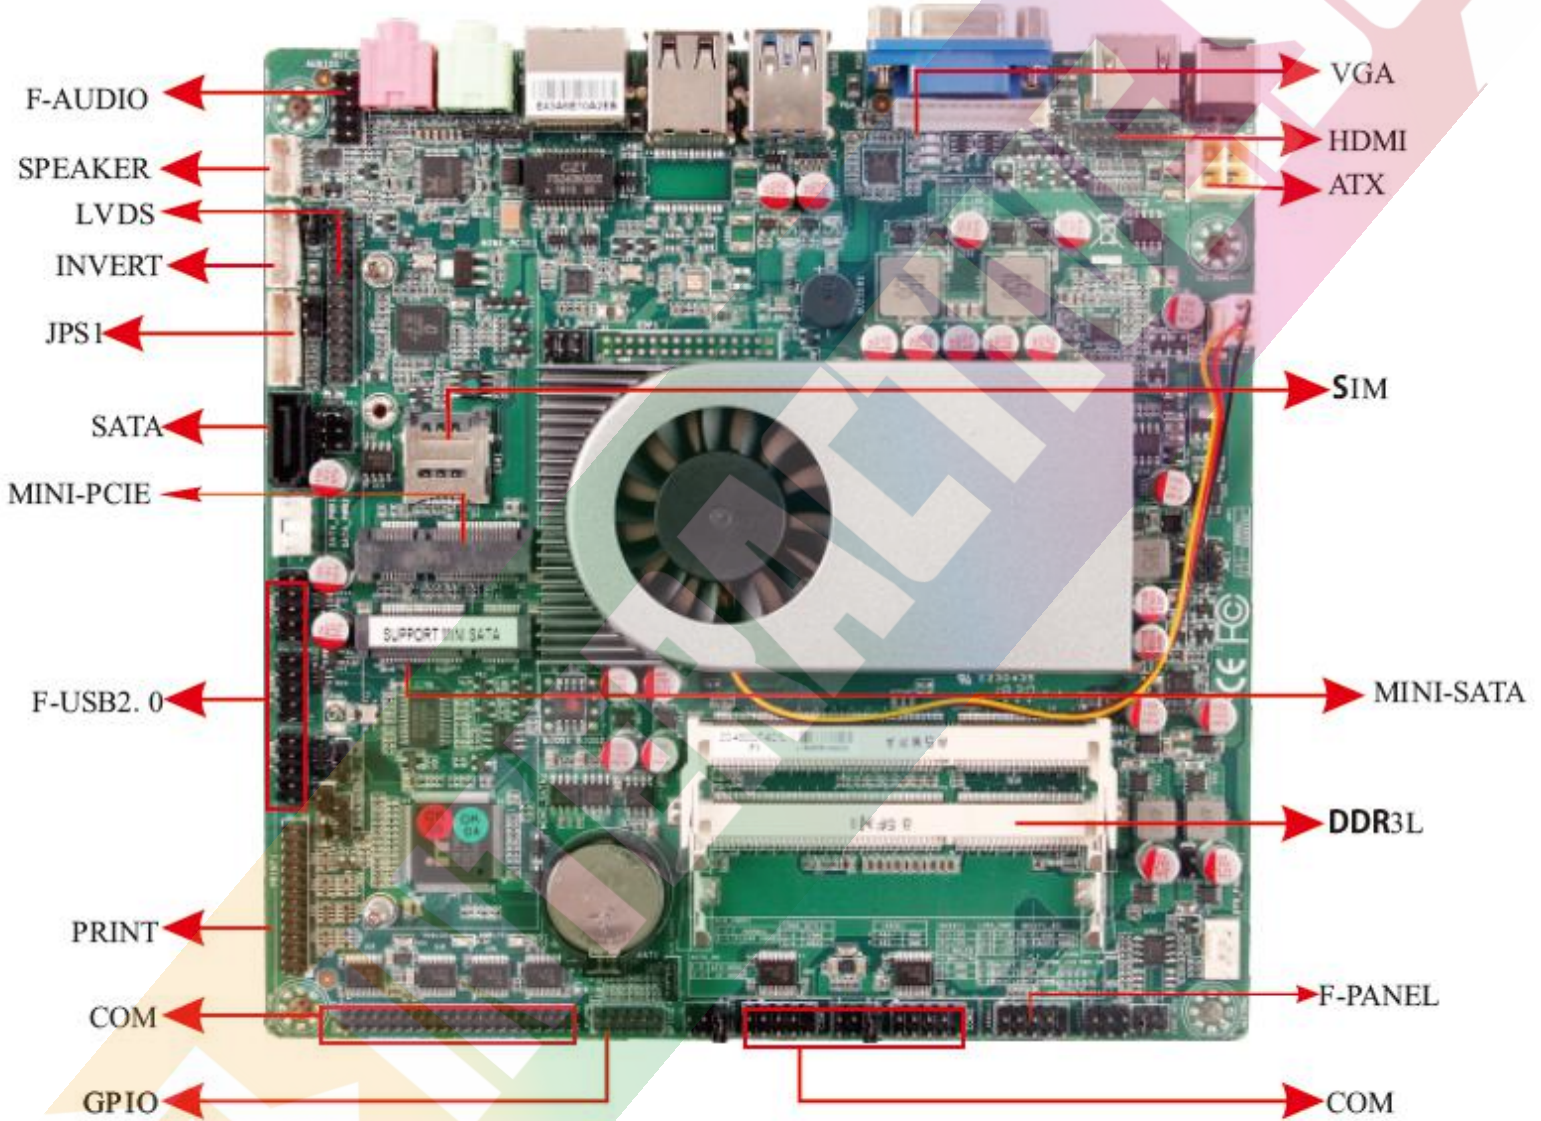

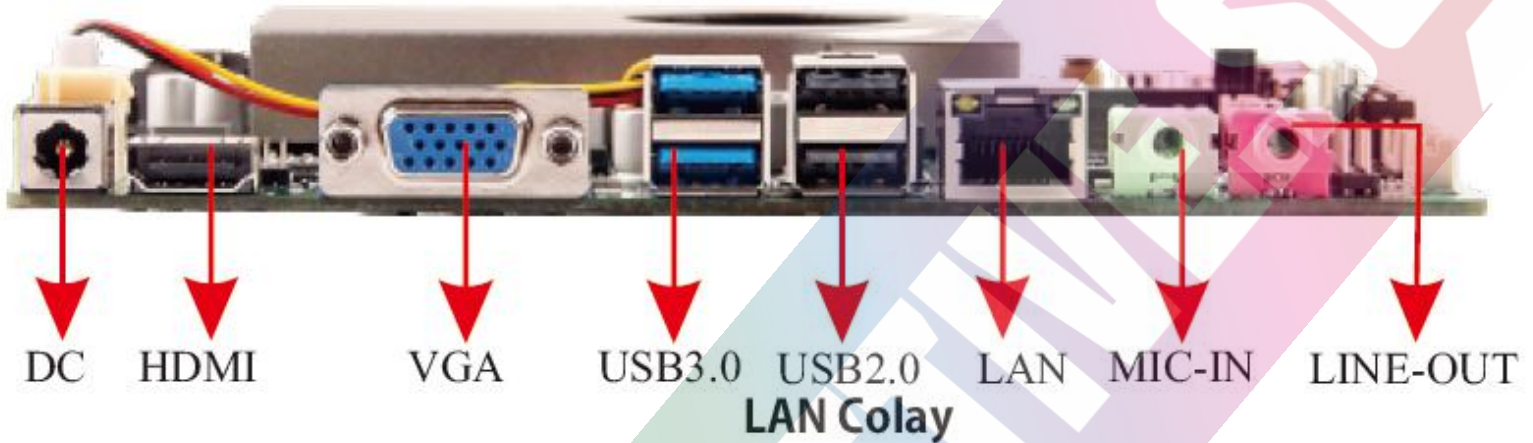

Model No.	IS4030UT
CPU	On-board Intel CORE I3 4030U Dual Core 1.9GHz
Chipset	Intel HM 65
System Memory	2 SO-DIMM , DDR3 1600/1333/1600MHz Memory Maximum Suppor 8G
Graphics	Intergrated Intel HD 4400 Graphics
Display Connector	VGA , HDMI , LVDS
On board LAN	1 Realtek RT8111E,1000M Ethernet controllers Support PXE Guidance,and Remote Wakening
On board Audio chip	Realtek ALC662 HD Audio Decode Controller

Storage	1*SATA III
Expand Socket	1*MINI-PCIE 1*MINI-SATA
USB	2*USB3.0 8*USB2.0 (6 USB need to expand)
COM	6*COM (1*485)
Power Supply	DC-IN , Built-in 4pin DC power supply Interface
Front I/O Interface	2×USB2.0 Ports 2×USB3.0 Ports 2×LAN Port 1×VGA Port 1×HDMI Port 1×MIC-IN port 1×LINE-OUT Port 1×DC

Rear I/O Interface	<ul style="list-style-type: none">1×VGA Pin2×COM-SET6×COM Pin1×HDMI Pin1×JPS1 Pin1×F_PANEL Pin1×PRINT Pin1×INVERT Pin1×LVDS Pin1×LDVS-PWR1×ATX Pin3×F-USB2.0 Pin (can expand to 6*USB2.0 port)1×SPDIF Pin1×GPIO Pin1×F-AUDIO Pin1×CLR_CMO clear CMOS jump cap1×AUTO-ON Jump Cap Of Automatically Turn On When coming Electricity1*SATA-PWR Pin1*SATA-SET
--------------------	--

	<p>1*SPDFI Pin</p> <p>1*SPEAKER Pin</p> <p>1*J485</p> <p>1*CIR</p> <p>1*JME</p> <p>1×CPU-FAN Pin</p> <p>2×SYS-FAN Pin</p> <p>1×F-Panel Pin</p>
BIOS	<p>AMIBIOS</p> <p>4/8Mbit Flash</p>
Form Factor	MINI-ITX (6 layers PCB) , 170mm*170mm
System Monitoring and Management	<p>Wake on LAN</p> <p>System Power Management</p> <p>Temperature management, voltage management</p> <p>Fan speed monitoring</p>
Working Humidity	0% ~ 95% (relative humidity, non-condensing)
Operating Temperature	-15°C ~ 60°C