
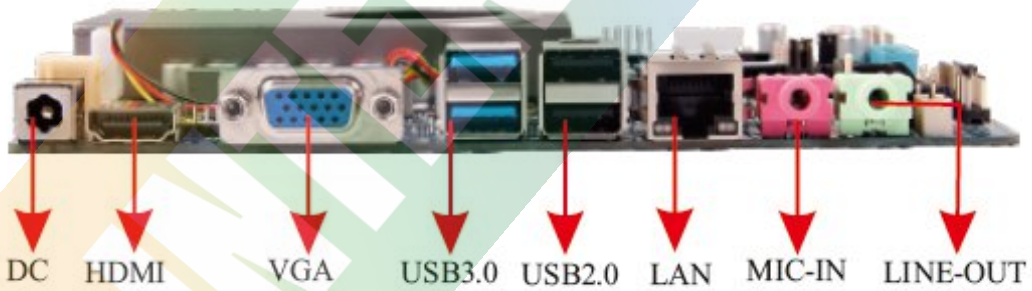


IS7100u

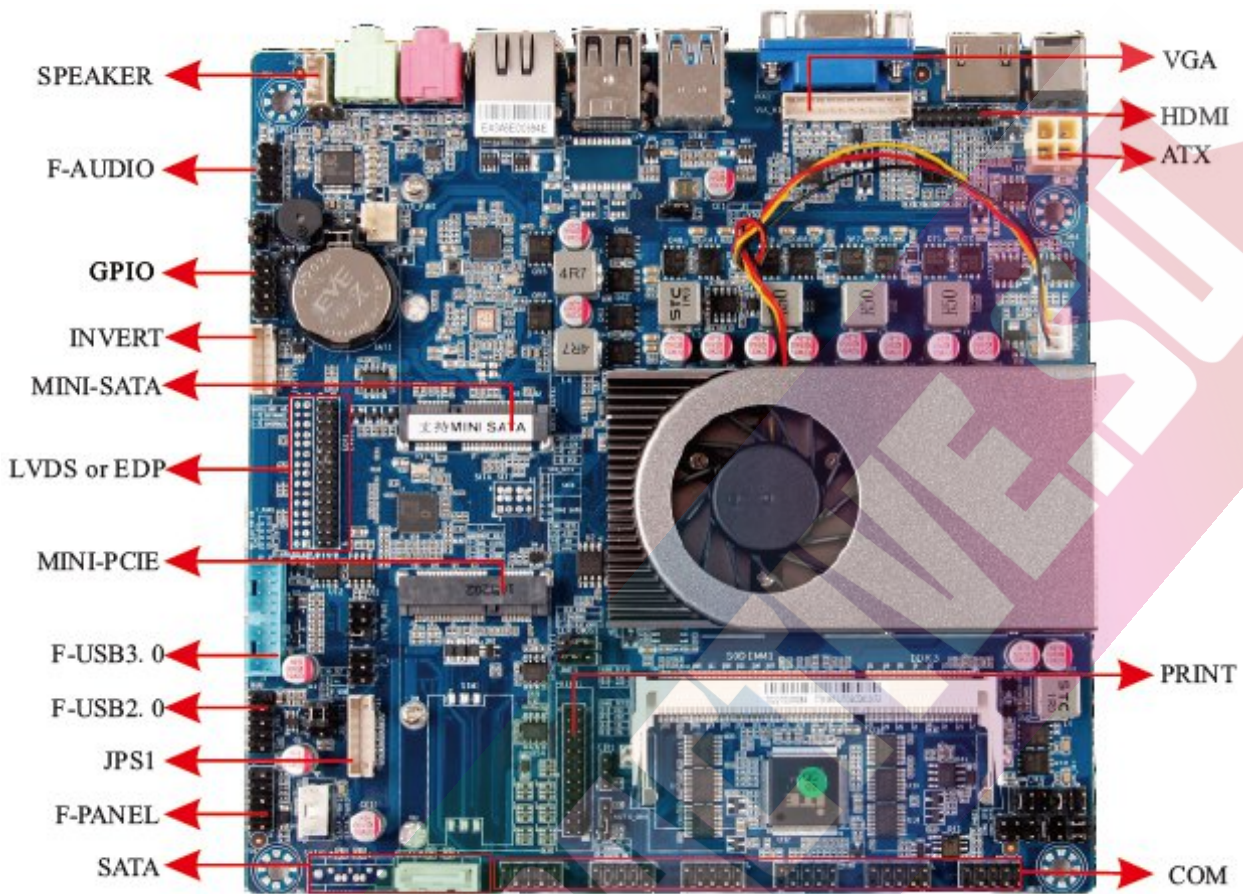

Model No.	IS7100U
CPU	On-board Intel Kabylake-U Core i3 7100U 2.4GHz
Chipset	SOC
System Memory	1*SO-DIMM, DDR3L 1600MHz , 16GB
Graphics	Intel HD Graphics 620
Display Connector	VGA 、 HDMI、 LVDS
On board LAN	On board 2*Realtek RTL8111E Gigabit Ethernet
On board Audio chip	Realtek ALC662 HD Audio Decode Controller
Storage	1*SATA 1*Mini-SATA
Expand Socket	1*MINI-PCIE(for WIFI)
USB	4*USB3.0 4*USB2.0
COM	6*COM
Power Supply	DC-IN , Built-in 4pin DC power supply Interface
Front I/O Interface	2*USB3.0 Port 2*USB2.0 Port(LAN Co-Lay) 1*LAN Port 1*VGA Port 1*HDMI Port 1*MIC-IN Port 1*LINE-OUT Port 1*DC Port
Rear I/O Interface	1*F-USB2.0 Pin (Can expand to 2*USB2.0 port) 1*F-USB3.0 Pin (Can expand to 2*USB3.0 port) 1*F-AUDIO Pin 1* SPEAKER Pin 6*COM pin 1*VGA pin 1*HDMI pin 1*JPS1 pin 1*F-PANEL pin 1*GPIO pin 1*PRINT pin

	1*INVERT pin 1*LVDS pin 1*DC pin 1*CIR pin 1×CLR_CMO clear CMOS jump cap 1×AUTO-ON Jump Cap Of Automatically Turn On When coming Electricity
BIOS	AMIBIOS 4/8Mbit Flash
Form Factor	MINI-ITX (6 layers PCB) , 170mm*170mm
System Monitoring and Management	Wake on LAN System Power Management Temperature management, voltage management Fan speed monitoring
Working Humidity	0% ~ 95% (relative humidity, non-condensing)
Operating Temperature	-15°C ~ 60°C