

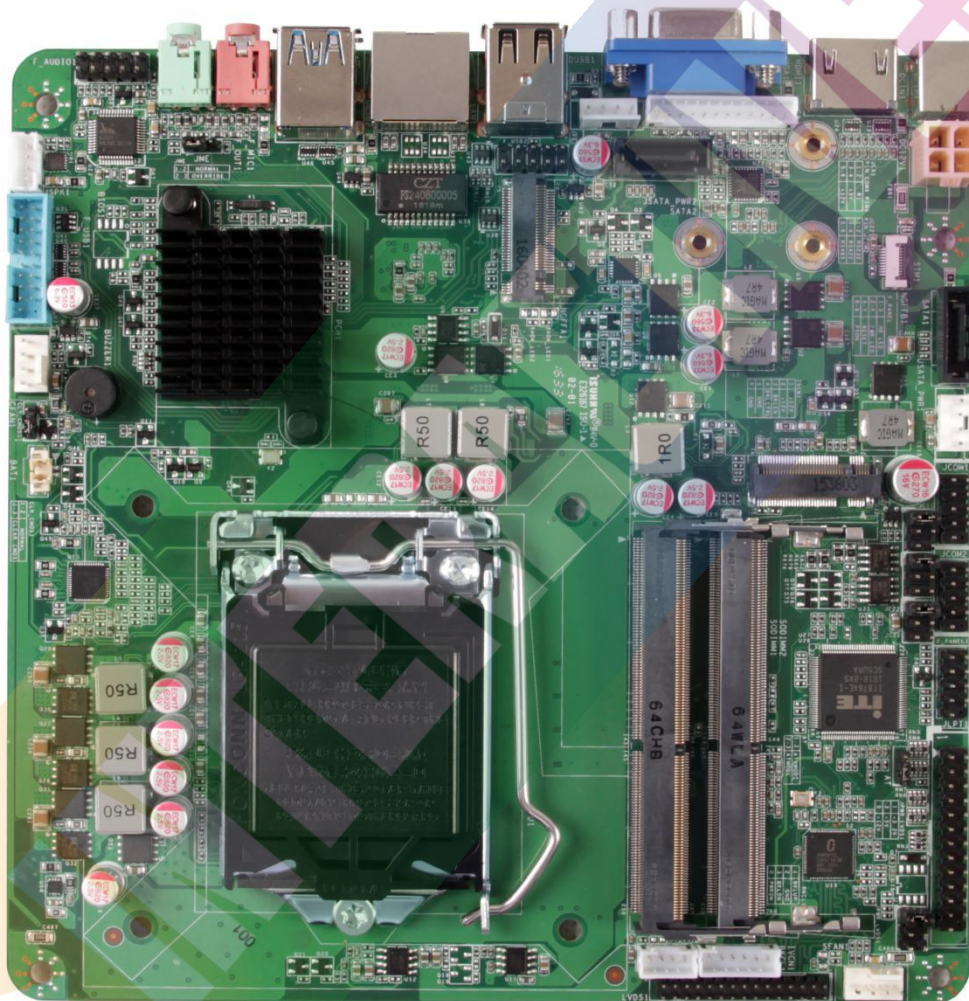


IS110P-2

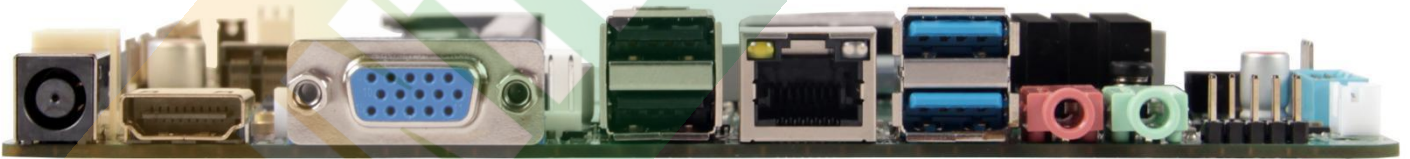

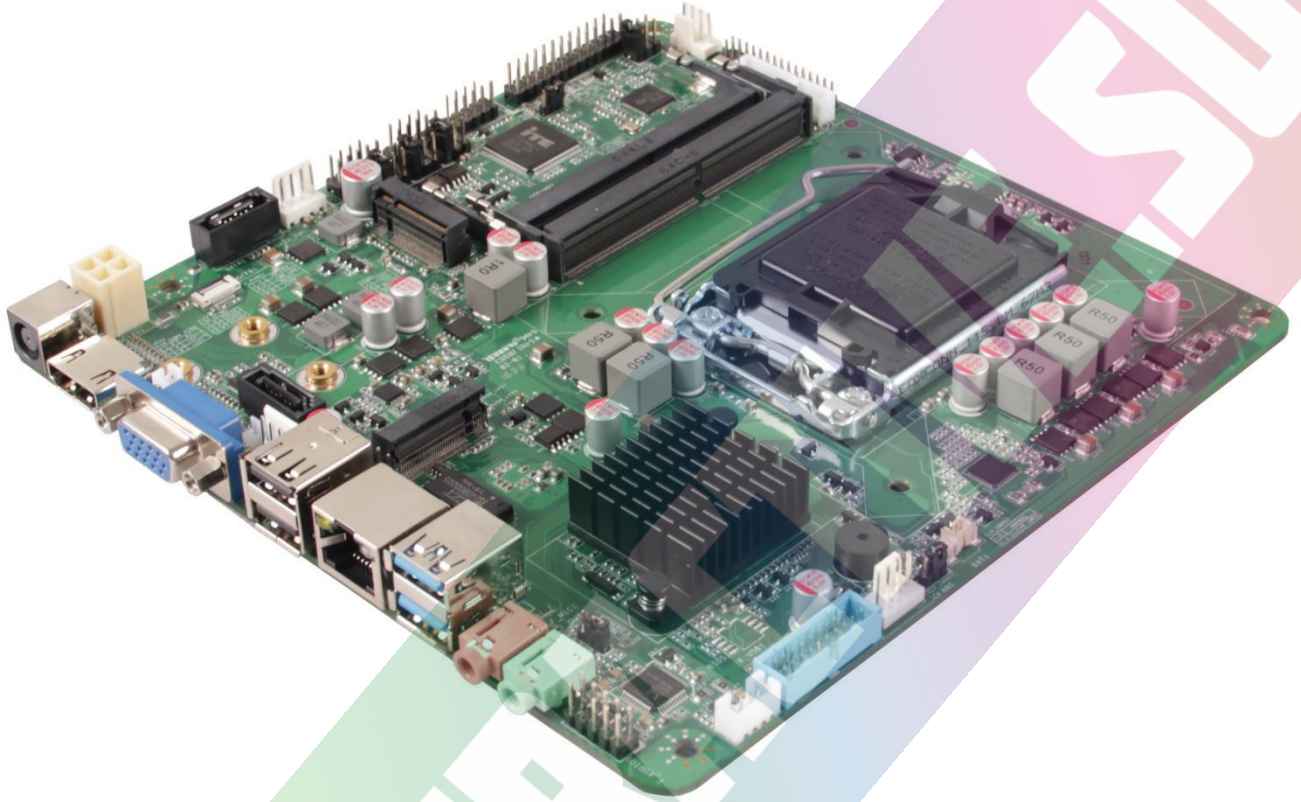

Support Intel® Skylake(LGA1151) Processor

On board VGA/LVDS/HDMI Display Built-in HD Graphic ,

4K HD Display ,On boardALC662 Channel ,

On board Amplier,on board1*NGFF-A ,

Support 4G/Wifi Onboard 1*NGFF-B(for SSD) ,

2*SATA Support 4*USB3.0 4*USB 2.0

Support 2*COM DC+4PIN ATX (19V) Power supply

Specification

CPU	support Intel LGA1151(Skylake-S) CPU
Chipset	Intel H110
GPU	Integrated Intel HD Graphics
Display output	VGA 、 LVDS、 HDMI
Memory	2*SO-DIMM DDR4 2133MHz, Memory, 16GB
Sound	Onboard 1*Realtek ALC662 HD audio decoding controller
Network	Onboard 1*Realtek RT8111E Gigabit LAN
Storage	2*SATA 1*NGFF-B
PCI-E	1*NGFE-A(for WIFI) 1*SIM
USB	4*USB3.0 4*USB2.0
COM	2* COM

Rear I/O port	<ul style="list-style-type: none"> 2*USB3.0 port 2*USB2.0 port 1*VGA port 1*HDMI Port 1*MIC-IN Port 1*Line-Out Port 1*LAN port 1*DC port
Internal I/O port	<ul style="list-style-type: none"> 1*USB3.0 pin(Can extend to 2*USB3.0 Port) 1*USB2.0 pin(can extend to 2*USB2.0 Port) 1* LVDS pin 1*VGA pin 2*COM pin 1*4PIN ATX 1*Audio Pin 1*Speaker Pin 1*6PIN INVERT pin 1*LPT Pin 1*F-PANEL pin
BIOS	AMI BIOS
Power supply	DC 12V 4PIN ATX power supply
Cooling system	Need self-made CPU radiator and fan
Working condition	-10~60°C ; 0% ~ 95% humidity, no condensation
Size	170X170MM MINI-ITX