




INTERACTIVE.SU

ISJ1900

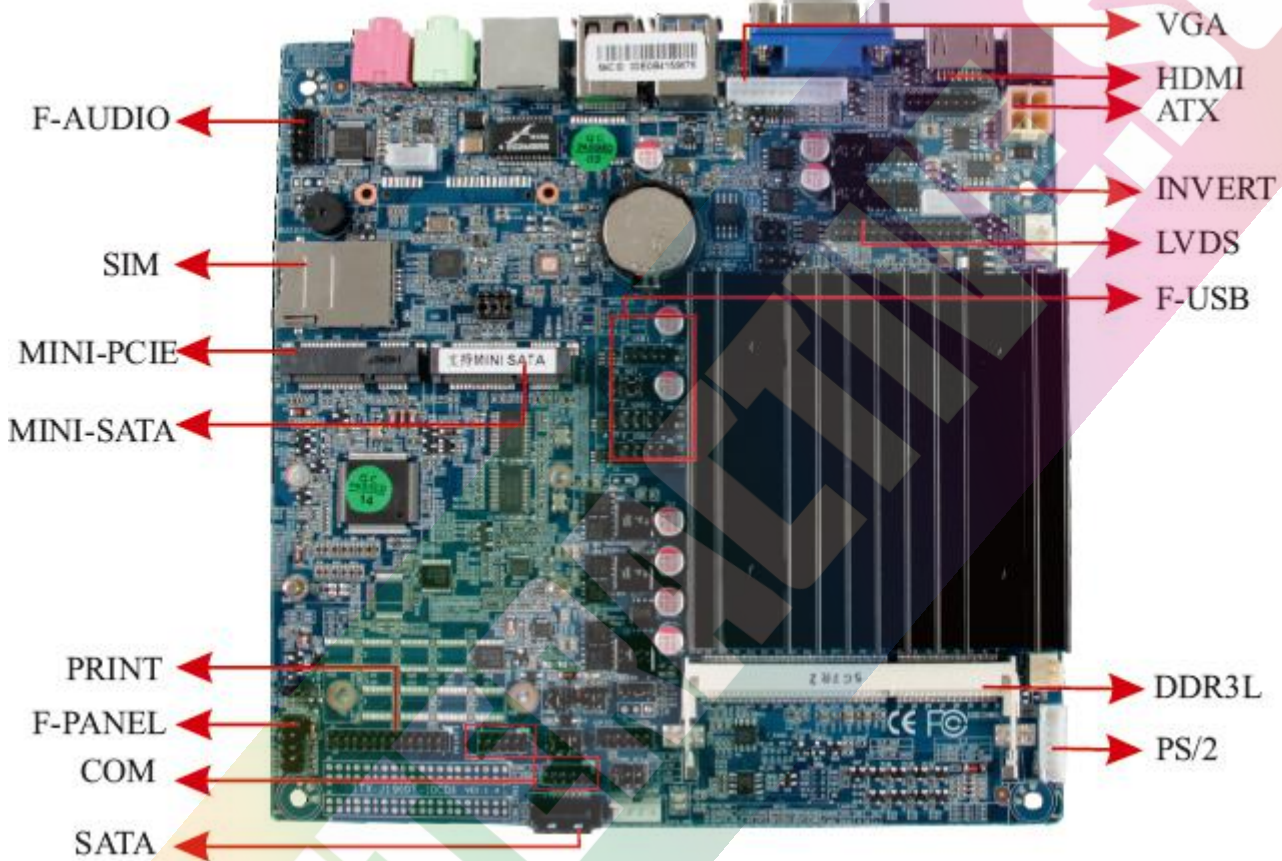

Labels for the rear panel connectors:

- DC
- HDMI
- VGA
- USB3.0
- USB2.0
- LAN
- LINE-OUT
- MIC-IN

Model No.	ISJ1900
CPU	Intel®Celeron J1900 four core Main frequency 2Ghz Max Turbo frequency 2.4Ghz
Chip set	Single Chip
System Memory	1×DDRIII 204Pin SODIMM , Maximum 8G
Graphics	Integrated Intel HD Graphics Core Graphics Card Video output support VGA、VGA pin、HDMI、HDMI pin、LVDS pin
Audio	ALC662 2/4/5.1 Audio Channel Output
LAN	1×Realtek 8111E Gigabit Ethernet
Expansion Slots	1×Mini-PCIE (Support 3G/WIFI Module) 1×Mini-SATA SSD 1×SIM
SATA Port	2×SATAII , Transmission Speed Max to 3Gbps
USB Port	2×USB3.0 8×USB2.0 (6×USB2.0 Need to Expand)
COM Port	2×COM Need to Expand
On board Pin	3×F-USB2.0 Pin (Expansible 6×USB2.0 port) 1×3G-SET Pin 2×COM Pin 2×COM-SET 1×J485 1×VGA Pin 1×HDMI Pin 1×JPS1 Pin 1×F_PANEL Pin 1×GPIO Pin 1×PRINT Pin 1×INVERT Pin 1×LVDS Pin 1×LDVS-PWR 1×ATX Pin 1×J-1 Backlit Controlling Pin

1× AUTO-ON Jump Cap
1× CLR-COMS Jump Cap
1× SYS-FAN 1× CPU-FAN
1× SATA-SET 2× SATA-PWR
1× SPDFI PIN
1× SPEAKER PIN

Side Jack and Port

2× USB3.0 Port 2× USB2.0 Port
1× LAN Port
1× VGA Port 1× HDMI Port
1× AUDIO
1× DC-IN

Hardware Monitoring

Wake on LAN
System Power Management
Temperature management
voltage management
Fan speed monitoring

BIOS

1. AMI BIOS
 2. Support Auto Turn-On when coming electricity
 3. Can be Customized
-

Power

DC-IN 12V

Heat dissipation

On Board CPU Radiation And Fan

Operating Temperature

-15°C ~ 60°C

**Working
Humidity**

0% ~ 95% (relative humidity, non-condensing)

Form Factor

Mini-ITX , 170×170mm

